


BRP Can-Am / Outlander max

No.: 2444.7239.1
Brend: BRP Can-Am
Model: Outlander G2 MY17
Year: 2017 -
Material: Al - 4 MM



Content

1. Plate 1.....	1 pc.	20. Bracket.....	2 pc.
2. Plate 2.....	1 pc.	21. Bolt M6x16.....	12 pc.
3. Plate 3.....	1 pc.	22. Bolt M8x30.....	4 pc.
4. Plate 4.....	1 pc.	23. Bolt M8x20.....	8 pc.
5. Plate 5.....	1 pc.	24. Bolt M8x25.....	32 pc.
6. Front arm guards.....	2 pc.	25. Bolt M8x35.....	4 pc.
7. Rear arm guards.....	2 pc.	26. Nut M6.....	12 pc.
8. Bracket.....	1 pc.	27. Nut M8.....	2 pc.
9. Bracket.....	1 pc.	28. Enlarged washer 8.....	22 pc.
10. Bracket.....	1 pc.	29. Washer 8.....	10 pc.
11. Bracket.....	1 pc.	30. Enlarged washer 6.....	12 pc.
12. Insert nut M8.....	4 pc.	31. Countersunk washer 8.....	20 pc.
13. Insert nut M8.....	8 pc.	32. Spring washer 6.....	12 pc.
14. Bracket.....	4 pc.	33. Washer 10.....	3 pc.
15. Bracket.....	1 pc.	34. Bracket.....	4 pc.
16. Bracket.....	1 pc.	35. Bolt M10x30.....	2 pc.
17. Insert nut 8.....	2 pc.	36. Screw M8x20.....	2 pc.
18. Bracket.....	4 pc.	37. Nut M10.....	1 pc.
19. Bracket.....	2 pc.	38. CV joint.....	4 pc.

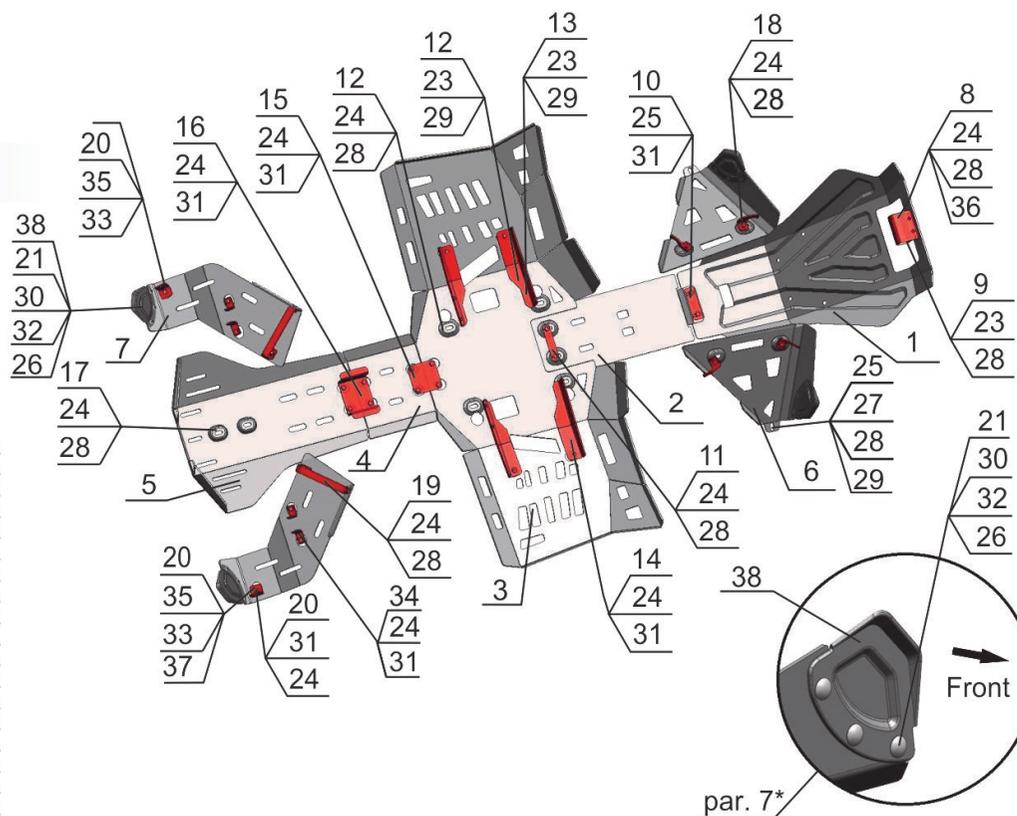

Installation Instructions

1. Remove the original plastic protection.
2. Fix bracket no.9 to bracket no.8 using bolts no.24 and washers no.28. Fix plate no.1, 2 to brackets no.9, 10, 11 using bolts no.24, 25, screws no.36 and washers no.28, 31.
3. Fix brackets no.14 to insert nuts M8 no.13 using bolts no.23 and washers no.29 (see appendix for arrangement of brackets no.14 on the vehicle). Fix plate no.3 to brackets no.14 and insert nuts no.12 using bolts no.22 and washers no.28, 31.
4. Fix plate no.4 to brackets no.15, 16 using bolts no.24 and washers no.31.
5. Fix plate no.5 to bracket no.16 and insert nuts no.17 using bolts no.24 and washers no.28, 31.
6. Fix CV joint guards no.38 to front arm guards no.6 with bolts no.21, washers no.30, 32 and nuts no.26. Fix front arm guards no.6

to brackets no.18 with bolts no.24 and washers no.28. Fix the sides of front arm guards with bolts no.25, washers no.28, 29 and nuts no.27 through the original apertures of the arms.

- 7*. Fix CV joint guards no.38 to rear arm guards no.7 with bolts no.21, washers no.30, 32 and nuts no.26. From right side of the vehicle fix bracket no.20 through the original hole of the hub using bolt no.35, washers no.33 and nut no.37. From left side of the vehicle fix bracket no.20 to the original hole of the hub using bolt no.35 and washer no.33. Fix brackets no.34 to the rear arms using the original bolts, spacers and washers. Fix rear arm guards no.7 to brackets no.19, 20, 34 using bolts no.24 and washers no. 28, 31.
8. Tighten all screws.

FRONT REDUCER GUARD 24.7239.1-1

1 x 1	2 x 1	8 x 1	9 x 1	10 x 1	11 x 1	<p>Screw M8x20 - 2 pc Bolt M8x25 - 4 pc Bolt M8x35 - 2 pc Enlarged washer 8 - 6 pc Countersunk washer 8 - 2 pc</p>
---------------------	---------------------	---------------------	---------------------	----------------------	----------------------	--

ENGINE BLOCK GUARD 24.7239.1-2

3 x 1	12 x 4	13 x 8	14 x 4	<p>Bolt M8x20 - 8 pc Bolt M8x25 - 8 pc Bolt M8x30 - 4 pc Enlarged washer 8 - 6 pc Washer 8 - 8 pc Countersunk washer 8 - 6 pc</p>
---------------------	----------------------	----------------------	----------------------	--

BACK REDUCER GUARD 24.7239.1-3

5 x 1	4 x 1	15 x 1	16 x 1	17 x 2	<p>Bolt M8x25 - 10 pc Enlarged washer 8 - 2 pc Countersunk washer 8 - 8 pc</p>
---------------------	---------------------	----------------------	----------------------	----------------------	--

TOOLS REQUIRED



TOOLS REQUIRED



FRONT ARM GUARDS 24.7239.1-4

6 x 2	18 x 4	38 x 2	<p>Bolt M6x16 - 6 pc Bolt M8x25 - 4 pc Bolt M8x35 - 2 pc Nut M6 - 6 pc Nut M8 - 2 pc Enlarged washer 6 - 6 pc Spring washer 6 - 6 pc</p>
---------------------	----------------------	----------------------	--

REAR ARM GUARDS 24.7239.1-5

7 x 2	19 x 2	20 x 2	34 x 4	38 x 2	<p>Bolt M6x16 - 6 pc Bolt M8x25 - 10 pc Bolt M10x30 - 2 pc Nut M6 - 6 pc Nut M10 - 1 pc Enlarged washer 6 - 6 pc Spring washer 6 - 6 pc Enlarged washer 8 - 4 pc Countersunk washer 8 - 2 pc Washer 10 - 3 pc</p>
---------------------	----------------------	----------------------	----------------------	----------------------	--

ADDENDUM

